

University of Groningen

## Photon Echo Spectroscopy in the Single Optical-Cycle Regime

Pshenichnikov, Maxim S.; Baltuska, Andrius; Wiersma, Douwe A.

*Published in:*  
Conference Digest. 2000 Conference on Lasers and Electro-Optics Europe, 2000

**IMPORTANT NOTE: You are advised to consult the publisher's version (publisher's PDF) if you wish to cite from it. Please check the document version below.**

*Document Version*  
Publisher's PDF, also known as Version of record

*Publication date:*  
2000

[Link to publication in University of Groningen/UMCG research database](#)

*Citation for published version (APA):*

Pshenichnikov, M. S., Baltuska, A., & Wiersma, D. A. (2000). Photon Echo Spectroscopy in the Single Optical-Cycle Regime. In *Conference Digest. 2000 Conference on Lasers and Electro-Optics Europe, 2000* (pp. 9-9). University of Groningen, The Zernike Institute for Advanced Materials.

### Copyright

Other than for strictly personal use, it is not permitted to download or to forward/distribute the text or part of it without the consent of the author(s) and/or copyright holder(s), unless the work is under an open content license (like Creative Commons).

The publication may also be distributed here under the terms of Article 25fa of the Dutch Copyright Act, indicated by the "Taverne" license. More information can be found on the University of Groningen website: <https://www.rug.nl/library/open-access/self-archiving-pure/taverne-amendment>.

### Take-down policy

If you believe that this document breaches copyright please contact us providing details, and we will remove access to the work immediately and investigate your claim.

*Downloaded from the University of Groningen/UMCG research database (Pure): <http://www.rug.nl/research/portal>. For technical reasons the number of authors shown on this cover page is limited to 10 maximum.*

10.00 CMB6

Laser written waveguides in glasses and crystals

M. Will, S Nolte, J -P Ruske, F Wunderlich, A Tunnermann

Friedrich-Schiller-University Jena  
 Institute of Applied Physics  
 Max-Wien-Platz 1, D-07743 Jena, Germany  
 Phone: +49 3641 657640  
 Fax: +49 3641 657680  
 will@iap.uni-jena.de

Waveguides for integrated optical applications are usually made by indiffusion of ions into crystal or glass materials. However, the generation of three-dimensional structures is hard to achieve. This problem can be overcome by laser generated waveguides.

Ultrashort laser pulses focused inside optical transparent bulk materials create local structural changes and in consequence of this a refractive index gradient. The result of moving the sample through the Laserbeam is a refractive index profile like in a buried waveguide.

This direct writing method offers the potential for three-dimensional waveguide structures and allows integrated optics in different materials.

The experimental setup is shown in Fig. 1. The laserpulses that we used to induce refractive index changes were obtained from a regeneratively amplified  $\text{Ti}^{3+}:\text{Al}_2\text{O}_3$  laser. The duration of the 780 nm pulse was 120 fs and the repetition rate of the laser was 1 kHz. The laserbeam with a pulse energy of a few microjoules was focused into the material. The sample was fixed on a computercontrolled XYZ stage.

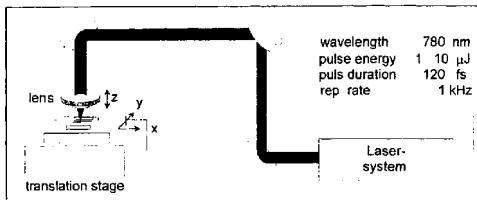


Fig 1

Generation of waveguides in fused and crystal silica is presented. Properties of the waveguides are discussed

10.15 CMB7

Photon Echo Spectroscopy in the Single Optical-Cycle Regime

Maxim S. Pshenichnikov, Andrius Baltuska, and Douwe A. Wiersma

Ultrafast Laser and Spectroscopy Laboratory, University of Groningen  
 Nijenborgh 4, 9747 AG Groningen, The Netherlands  
 Phone: ++31 50 363 4159, Fax ++31 50 363 4441, e-mail M.S.Pshenichnikov@chem.rug.nl

A very high temporal resolution and a broad bandwidth are but two advantages provided by the use of extremely short sub-5-fs pulses [1] in a nonlinear spectroscopic experiment. However, the applicability of the standard theoretical description becomes questionable for the pulses that consist merely of a couple of optical oscillations. For instance, the conventionally employed slowly varying envelope approximation, implying that the change of the pulse amplitude on the duration of an optical cycle is negligible compared to the magnitude of the amplitude itself, can no longer be maintained. Furthermore, the phase-matching bandwidth that is limited due to dispersion in the nonlinear medium rapidly gains importance with the increase of the spectral width of the pulse. Another point of serious concern is the frequency-dependent variation in the sensitivity of signal photodetectors. In combination, the above listed features result in what is known as a spectral-filter effect. Finally, artificial lengthening of the experimental transients is a direct consequence of the noncollinear geometry employed in spectroscopic experiments.

In this Contribution we present a theoretical analysis which thoroughly reexamines the formalism of ultrafast photon echo spectroscopy. We obtain a general expression for the echo signal, which is valid even for single-cycle-pulse applications. The derived formalism is applied to photon-echo spectroscopy on the hydrated electron with 5-fs pulses.

According to our calculations, a careful choice of the beam geometry and selection of a photodetector with the suitable spectral sensitivity defeats the otherwise damaging role of the spectral-filter effect as well as that of geometrical smearing. Importantly for the weak-signal applications such as photon echo spectroscopy, the absence of spectral filtering eliminates the otherwise unavoidable requirement to frequency-resolve the signals.

Figures 1 presents the two-pulse photon echo signals obtained from the neat water and electrons, solvated in water. A minute difference in the widths of these two traces suggests that the electronic dephasing of the hydrated electrons is extremely fast. The finite population lifetime of the electrons in the excited state causes the delay of the echo trace in Fig.2b. The best fit to the experimental data yields a pure dephasing time of  $T_2 = 1.6$  fs. With this value, the absorption spectrum of the hydrated electron can be successfully modeled provided the conventionally used rotating wave approximation is abandoned [2].

References

1. A. Baltuska *et al.*, Opt. Lett. 22, 102 (1997); M. Nisoli *et al.*, Opt. Lett. 22, 522 (1997); A. Shirakawa *et al.*, Appl. Phys. Lett. 74, 2268 (1999).
2. A. Baltuska *et al.*, J. Phys. Chem. A103, 10065 (1999).




Fig 2. Results of two-pulse photon echo experiments on water alone (a) and hydrated electrons (b). Circles represent experimental data points and solid curves show results of simulations.